


Vacuum lifting device eT-Hover-univac-line-mini



For efficient and  
power-independent handling  
of loads up to 200 kg



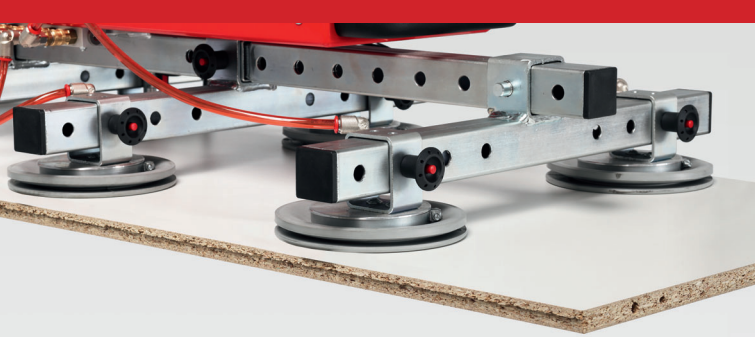

## eT-Hover-univac-line-mini



Our lightweight, space-saving lifting device for indoor and outdoor use allows you to lift, transport, rotate, and pivot virtually any material **horizontally and vertically**.

With its highly flexible application options, the modular vacuum lifter increases efficiency by automating and accelerating work processes, as well as reducing and optimizing labor.

When handling heavy and delicate **loads up to 200 kg** – even in the tightest spaces – it also significantly increases and improves employee safety and motivation.






- Suitable for panels and workpieces made of glass, metal, or plastic, and coated wood panels up to 2500 x 1000 mm
- Manual rotation range: 360° continuous  
Manual swivel range: 90°
- Compact and lightweight design, modularly expandable and variable in size
- Mains-independent battery operation with quick-change battery, control on the device or via radio remote control. Additional battery systems available upon request.
- Vacuum generation via 2 separate vacuum pumps
- **Convenient single-person operation** via an ergonomic panel, equipped with, among other features, a vacuum gauge, signal lamps, two-hand operation, and acoustic signaling devices
- Adaptable to overhead cranes, mobile small cranes, or telehandlers
- Dual-circuit system for construction site operation

**univac-line-mini is available in two versions:**


**With bellow suction cups** for transporting delicate workpieces with uneven, curved, or slanted suction surfaces.

**With flat suction cups** for transporting delicate workpieces with smooth, slightly textured, and flat surfaces.

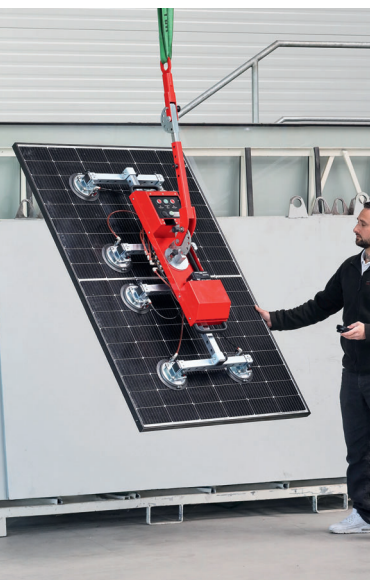

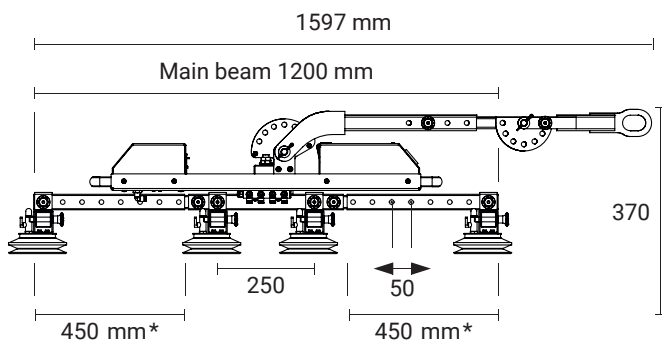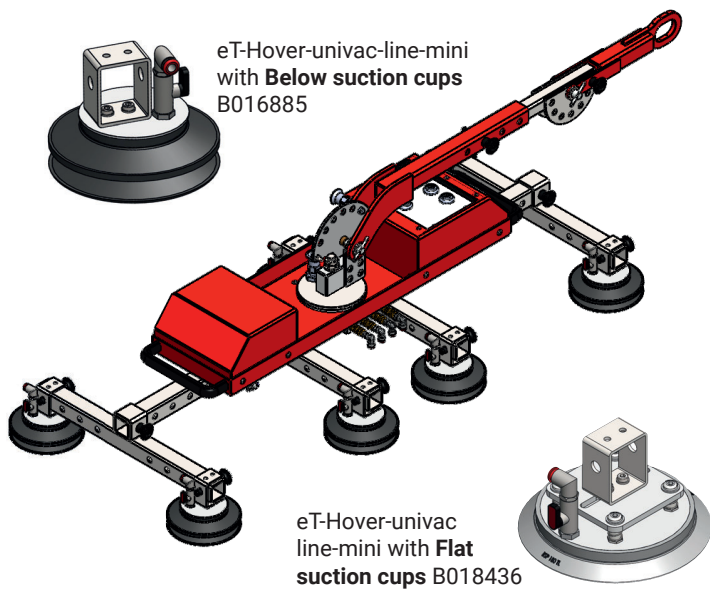

\*On the outer main beam, the cross beams are adjustable at 50 mm intervals.

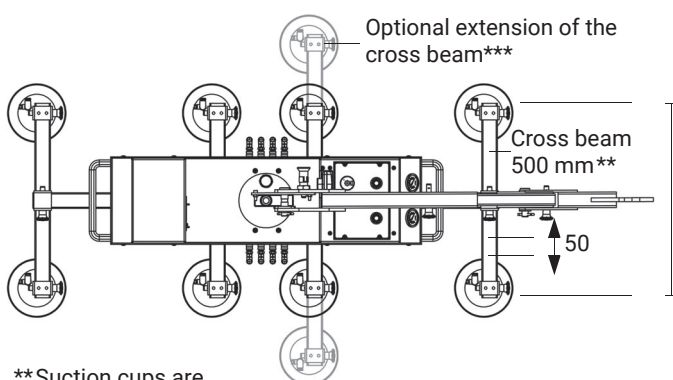

\*\*Suction cups are adjustable at 50 mm intervals on the four cross beams.

## eT-Hover-univac-line-mini

Item number	B016885	B018436
Suction cup equipment	Bellow suction cups BBSC 150 R	Flat suction cups BLSP 180 TL
Load capacity total indoor	200 kg vertical 200 kg horizontal	
total outdoor	100 kg vertical 200 kg horizontal	140 kg vertical 200 kg horizontal
per suction cup indoor	24 kg vertical 47 kg horizontal	34 kg vertical 69 kg horizontal
per suction cup outdoor	12 kg vertical 24 kg horizontal	17 kg vertical 34 kg horizontal
Additional suction cups on request		

Rotation range	360° endless
Swivel range	90°

Main beam*	Length: 1200 mm, modular
Cross beam**	Length: 500 mm
Dimensions total	1597 x 600 x 370 mm
Weight	33 kg

Battery	2 x Bosch professional 18 V / 4 Ah Other battery systems on request
Battery voltage	18V/DC
Electr. connection	1 x 230V+N+PE, 50/60 Hz

Subject to technical changes.

To accommodate your specific application, your lifting device can be customized in width and length with optional crossbeams.

Both lifting device versions can be easily and cost-effectively retrofitted with bellows suction cups or flat suction cups.

We are happy to manufacture special designs for you, for example, for handling overhanging or bulky elements.







**Efficient handling and  
transport solutions  
with vacuum technology**

euroTECH Handling GmbH  
Maybachstr. 7  
D-72348 Rosenfeld, Germany  
Phone +49 7428 93912-0  
[info@et-handling.de](mailto:info@et-handling.de)  
[www.et-handling.de](http://www.et-handling.de)

